



# Model F-18R Fan Specifications For Open Rafter Ceilings

| Volts | Hz | Full Load Amps | Running Watts | RPM   | Wt. (lbs) | ACFM  |
|-------|----|----------------|---------------|-------|-----------|-------|
| 120   | 60 | .25            | 31            | 1,550 | 8.1       | 1,061 |
| 120   | 60 | .17            | 20            | 1,300 | 8.1       | 891   |
| 120   | 60 | .07            | 8             | 900   | 8.1       | 616   |

## Description

The Air-Row F-18R is a destratification fan designed for open ceilings. This fan delivers a column of air no wider than 2-3' from as high as 40' from the ceiling to the floor and spread across the floor.

## ECM Motor


- 3-speed
- Efficiency 65-70%
- IP 55
- "Soft Start" feature
- Thermal protection
  - One shot thermal fuse
  - Built-in electronic overload protection

## Housing

- 0.40 aluminum
- Polar white

## Warranty

- Full warranty for three years
- ETL Certified USA and Canada

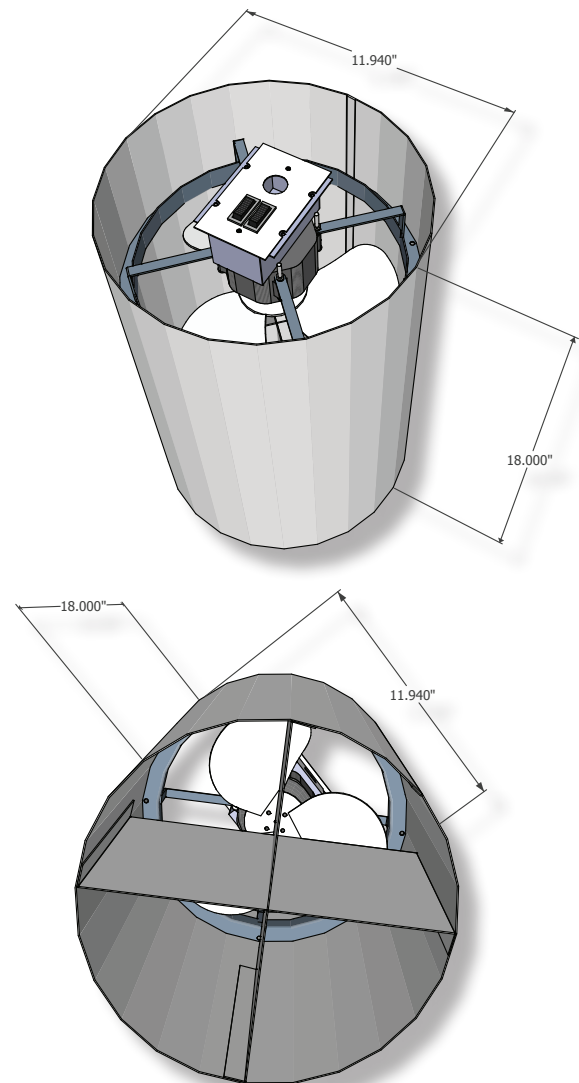

F18SpecRev4.21.14